


RS31-EZ(-T) Ins

Install Instructions For:

RS31-EZ(-

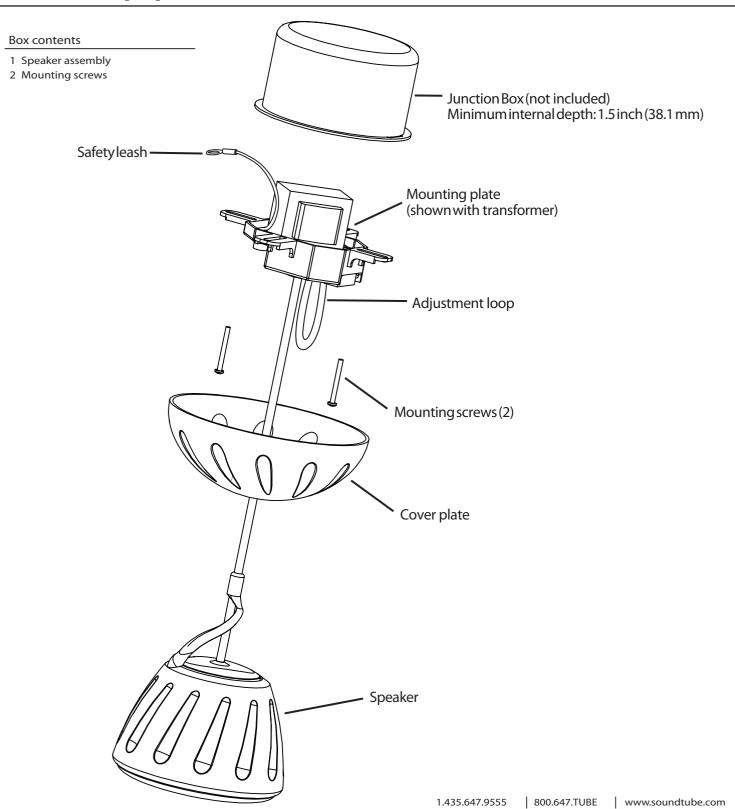


©2012 SoundTube Entertainment, Inc. All rights reserved. PNINS-RS31-EZ Rev 03.01.12




Warning







1. Remove speaker assembly from the box.




2. Feed signal wire from ceiling 3. Where needed, connect through the mounting plate via wire opening.




safety leash to secure point on structure/junction box.




4. Screw mounting plate into the junction box (not included) using the moutning screws provided.




5. Connect Signal wire into terminal block




6. RS31-EZ-T wiring: Connect the negative signal wire to "com" and the positive signal wire to the desired power tap as indicated.




7. RS31-EZ wiring: Connect the negative signal wire to the (-) negative input and the positive to the positive (+) input.




8. Set speaker height by adjusting speaker wire. Push wire through the central hole while pulling on the center slack line to shorten the speaker hanging height. Reverse to lengthen.



9. Move cover plate up speaker wire, begin to thread cover plate into mounting plate, leaving half an inch between cover plate and mounting surface.



10. Excess wire can be hidden inside of cover plate by wrapping excess wire clockwise and into gap between plate and surface



11. Completely thread cover plate to secure speaker.

Done.