

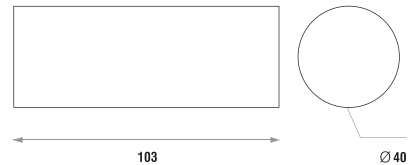


Image of 105xø40cm models Ref.:TUB103 (on the left with MOTIF® finishing) and Ref.:TUB103 applied (ambient image).

DESCRIPTION

The TUBABSORBER® is one of the important absorbent elements of mid-low frequencies in our catalogue. This panel was built to take most advantage in areas where there is a strong incidence of acoustic pressure that is usually generated in the corners and edges of rooms. That high energy is changed into short movements of air, which is retained inside its box. Due to the way it works, the TUBABSORBER® can be mounted on the floor, in horizontal or vertical corners or on walls and ceilings, with the help of the different accessories available for each application. When it is placed on the floor, it is also easy to install it and adjust it, in order to optimise results.

TECHNICAL DRAWINGS




FEATURES

- Uses 60% of recycled materials.
- Tuned to 200Hz.
- Average absorption: **0.86/m²** [$>50\text{Hz}; <250\text{KHz}$].
- 100% recyclable.
- Fire-resistance: M1.
- Package: 1 and 2 units.
- Installation: accessories included

MODELS AND SIZES


MODELS	HEIGHT	DIAMETER	WEIGHT
TUB103	103 cm	40 cm	8.2 Kg

ABSORPTION COEFFICIENT

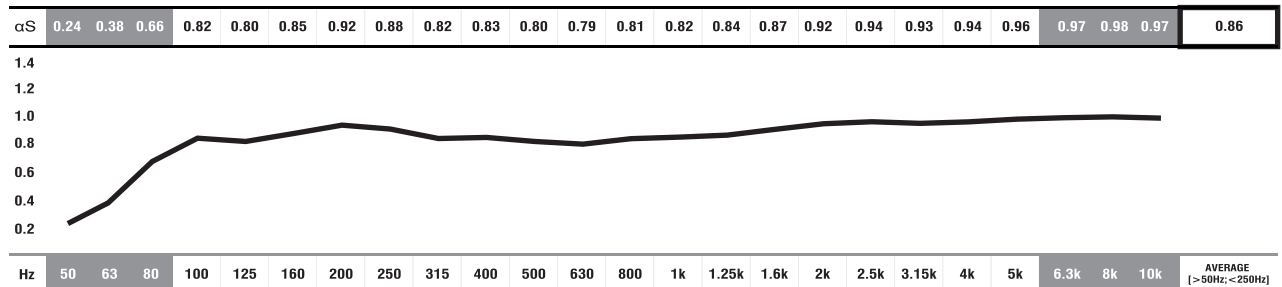

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654. ■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

STANDARD FABRIC COLOURS

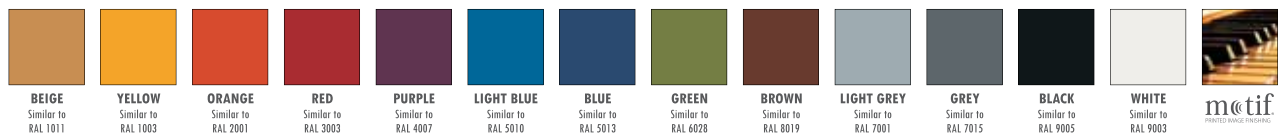

IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Wood and Fabric products are highly susceptible to change its appearance with humidity and temperature. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.