



BASSKEEPER ANGLE®

TUNED ABSORPTION PANEL



Image of 120x40cm model Ref.:BKA120 (on the left) and Ref.:BKA120 applied (ambient image).

DESCRIPTION

The BASSKEEPER ANGLE® is the best proposal from the ATP® low-frequency absorption panels. It produces an overpowering effect in the corners of the room where the basses build-up is most often present. The BASSKEEPER ANGLE® is an open resonance box model, tuned to 160 Hz, thus being very effective.


The BASSKEEPER ANGLE® and the BASSKEEPER WALL® have the same shape and are bass traps. The BASSKEEPER ANGLE® is applied in corners while the BASSKEEPER WALL® is applied on walls. It is a first-rate approach to tame low-frequency anomalies in your room.

In most cases, the combination of these two models solves all problems caused by the accumulation of low frequencies in the room, by allowing you to create your own design while providing acoustic control of low frequencies.

FEATURES

- Average absorption: 0.78/m² [$>100\text{Hz}; <250\text{Hz}$].
- EPS Fire Reaction: Euroclass E (NP EN 13501-1).
- Package: 2 units.
- Very easy to install.
- Other colours available upon consultation.


TECHNICAL DRAWINGS



MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
BKA120	120 cm	40 cm	40 cm	3.6 Kg

ABSORPTION COEFFICIENT

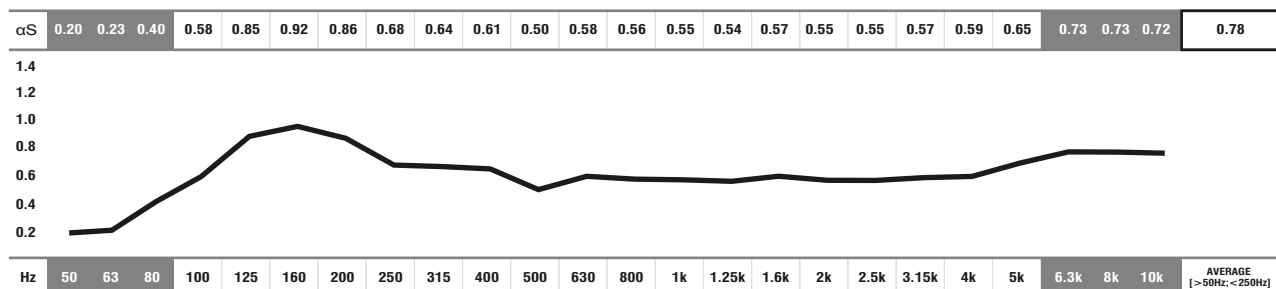

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $> 5\text{K}$] are Non Standard Values.

STANDARD PROJECTABLE CELLULOSE FINISHING COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.

